

## DS-KH6100-E1 Network Indoor Station



The 4.3-inch series indoor station satisfies the demands of the entry level market and the intercom apartment market, which can provide flexible and convenient intercom functions, customized touch buttons functions, etc., while meeting the needs of customers with limited budgets.

- 4.3-inch colorful non-touch screen with resolution 480 × 272
- Standard PoE power supply without additional power adaptor
- Views live videos of door stations and linked cameras
- Convenient for users to customize functions according to their own usage habits by 4 custom touch buttons

## ▪ Specification

System parameters	
Operating system	Linux
ROM	8 MB
RAM	64 MB
CPU	Embedded processor
Display parameters	
Screen size	4.3-inch
Operation method	9 touch buttons
Type	Colorful TFT
Resolution	480 × 272
Video parameters	
Lens	/
Resolution	/
FOV	/
WDR	/
Video compression standard	/
Focal length	/
Audio parameters	
Audio compression standard	G.711 U, G.711 A
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Event capacity	200
Notice capacity	200
Linked indoor extensions capacity	16
Network parameters	
Communication protocol	TCP/IP, SIP, RTSP
Wi-Fi standard	/
Bluetooth version	/
3G/4G standard	/
Zigbee	/
Device interfaces	
Alarm input	/
Network interface	1 RJ-45 100 Mbps
RS-485	/
USB	/
TF card	/
Alarm output	/



No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T: +86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.



General	
Button	9 touch buttons
Installation	Wall mounting, table mounting
Indicator	0
Weight	With package: 330.6 g (0.7 lbs) Without package: 191.8 g (0.4 lbs)
Protective level	/
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90%
Dimensions	120 mm × 120 mm × 21 mm (4.7" × 4.7" × 0.83")
Application environment	Indoor
Power consumption	≤ 4 W
Language	English, French, Portuguese, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Turkish, Vietnamese, Arabic, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian Danish, Slovenian, Slovak, Swedish, Finnish, Mongolian, Hebrew, Kazakh, Uzbek
Power supply	IEEE802.3af, Standard PoE, 12 VDC

## ▪ Available Model

DS-KH6100-E1

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global




Hikvision  
Corporate Channel



hikvisionhq

▪ **Dimension**

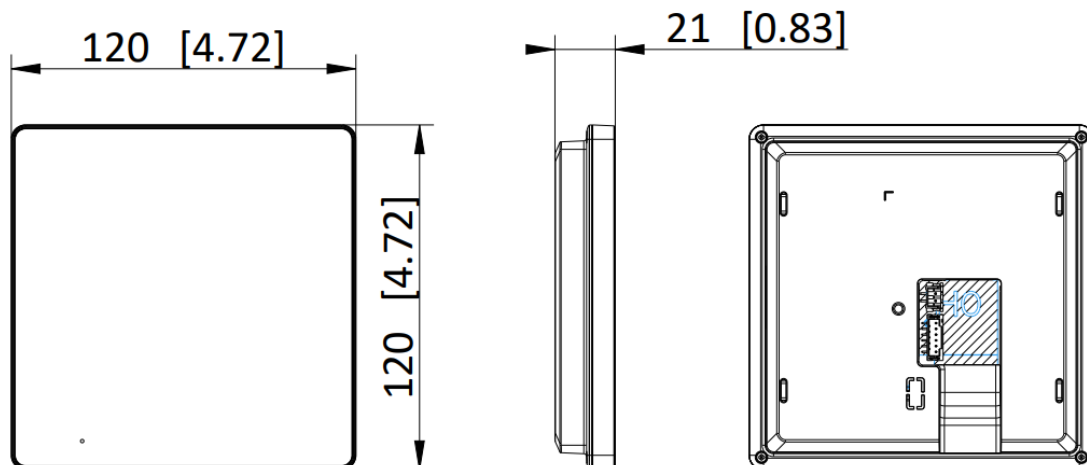


Unit:mm [inch]

SCALE	1:1
-------	-----

▪ **Accessory**

▪ **Optional**

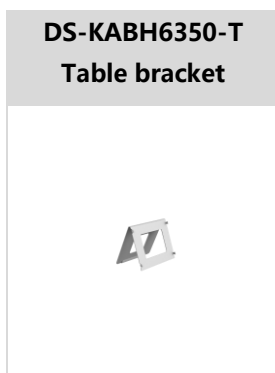

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

